

## B-2FLF

### Flush-mounted magnetic contact


b2FLF\_en 09/25

The B-2FLF magnetic contact is used to detect the opening of doors, windows, etc. It is designed for flush mounting. It is available in white (B-2FLF) and brown (B-2FLF BR).

### 1. Description

The B-2FLF magnetic contact consists of a reed switch and a magnet (Fig. 1). Moving the magnet away from the reed switch (by opening the door or window) opens the reed switch contacts.

The reed switch and the magnet are placed in plastic enclosures. The reed switch has wires run directly from its enclosure.

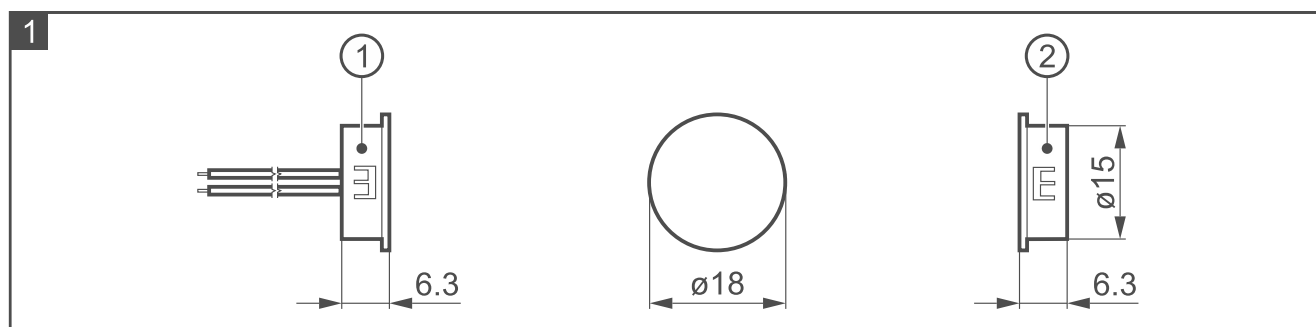

① reed switch

② magnet

### 2. Tips for installation



**Disconnect power before making any electrical connections.**

- The magnetic contact should be installed indoors, in spaces with normal air humidity.
- Install the magnetic contact in the upper part of the window frame. This will reduce the risk of flooding the magnetic contact when the window is tilted or open.
- Install the reed switch in the window frame / door frame (fixed surface).
- Install the magnet in the window / door (moving surface).
- Do not install the magnetic contact in ferromagnetic materials or in the vicinity of strong magnetic or electric fields.
- The object in which the reed switch or magnet are to be installed should be at least 5 mm thick to ensure adequate stability of the installed components.



*Do not hammer the reed switch into the hole (you may break the reed switch).*

### 3. Specifications

Magnetic contact type .....	NC
Maximum switching voltage .....	100 V
Maximum switching current .....	0.5 A
Maximum contact rating .....	10 W

Maximum contact resistance.....	0.2 $\Omega$
Make distance.....	13 mm
Break distance .....	18 mm
Operating temperature range.....	-10°C...+55°C
Maximum humidity .....	93±3%
Environmental class according to EN50130-5 .....	II
Reed switch / magnet enclosure dimensions .....	6.3 x 18 mm
Length of wires.....	450 mm
Weight.....	8 g

**The declaration of conformity may be consulted at [www.satel.pl/ce](http://www.satel.pl/ce)**