# INTEGRA 64

## ADVANCED CONTROL PANEL WITH 16 UP TO 64 ZONES

Advanced alarm control units providing alarm functions and optional implementation of home automation and access control systems. With a broad range of extension modules, their applications can be adapted to individual needs: from minor systems to extensive installations. Communication features combined with additional modules, such as GSM and TCP/IP, are a major advantage of the **INTEGRA** control units.

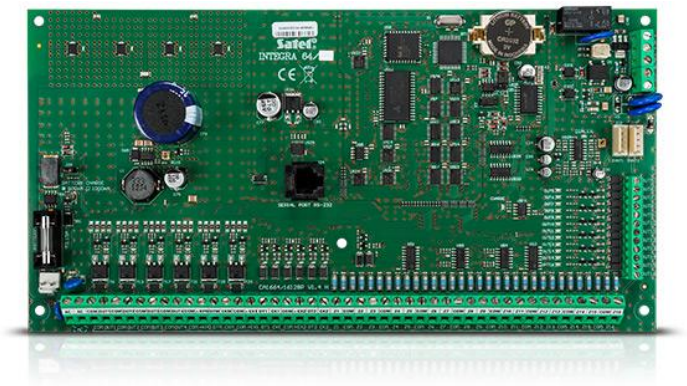

- 16 up to 64 zones
- 32 partitions, 8 objects
- 16 up to 64 programmable outputs
- keypads and expansion modules buses
- built–in telephone dialer with monitoring, voice messaging and remote control features
- access control and home automation features
- system operation with LCD keypads, partition keypads, keyfobs and proximity cards or remotely with mobile phone or PC
- 64 independent timers for automatic control
- event log with 5887 entries and event printing feature
- 192+8+1 users
- RS–232 port – RJ type socket
- flash firmware upgrade with a PC
- built–in 3 A switching mode backup power supply with battery charging and diagnostic features
- option of not reporting possible problems with connecting to the SATEL server as a failure

## TECHNICAL DATA

| | |
|---|---|
| **Environmental class** | II |
| **Protection class** | S |
| **Max. battery capacity** | 24 Ah |
| **Control panels** | 13,8 V DC |
| **Low current programmable outputs rating** | 50 mA |
| **High current programmable outputs rating** | 3000 mA |
| **Power supply rating** | 3 A |
| **Board dimensions** | 264 x 134 mm |
| **Operating temperature range** | -10...+55 °C |
| **Main board supply voltage (±15%)** | 20 V AC, 50-60 Hz |
| **Standby mode current consumption** | 149 mA |
| **Max. current consumption** | 337 mA |

The actual appearance of the products may differ from the presented images. Product descriptions are provided in the web service for information purposes only.